

NCA-5520

1U 19" Rackmount Network Appliance Built with 2nd Gen Intel® Xeon® Scalable Family Processors (Codenamed Cascade Lake SP)



Images are for reference only. See ordering information for SKU details.

■ Features

- 2nd Gen Intel® Xeon® Scalable Family Processors (Codenamed Cascade Lake SP)
- 4x GbE RJ45 or 4x 10G SFP+ Lewisburg Internal MAC
- 10x 288pin DDR4 2933/2666/2400/2133 MHz REG DIMM (By CPU), Max. 640GB
- 1x RJ45 and 1x Mini USB Consoles, 2x USB 3.0
- Intel® QuickAssist Technology (By SKU)
- 1 x PCIe*8 FH/HL (Optional), 1x mSATA
- 2x 2.5" Internal HDD/SSD Bays, 4x NIC Module Slots
- 650W 1+1 Redundant PSUs, 4x Swappable Fans


■ Specifications

Platform	
Form Factor	1U 19" Rackmount
Processor Options	2nd Gen Intel® Xeon® Scalable Family Processors (Cascade Lake SP)
CPU Socket	1 x LGA3647
Chipset	Intel® C621/C626
Security Acceleration	Intel® QuickAssist Technology (By SKU)
BIOS	AMI SPI Flash BIOS
System Memory	
Technology	DDR4 2933/2666/2400/2133 MHz REG DIMM (By CPU)
Max. Capacity	640GB
Socket	10 x 288-pin REG DIMM
Networking	
Ethernet Ports	4 x GbE RJ45 or 4 x 10G SFP+ Lewisburg Internal MAC
Bypass	Depending on NIC Module Specifications
NIC Module Slot	4
LOM	
IO Interface	1 x RJ45 (Optional)
OPMA Slot	N/A, IPMI Chip Onboard
I/O Interface	
Reset Button	1
LED	Power/Status/Storage
Power Button	1 x ATX Power Switch
Console	1 x RJ45, 1x Mini USB
USB	2 x USB 3.0
LCD Module	N/A (Optional)
Display	Internal Pin Header
Power Input	AC Power Inlet on PSU
Storage	
HDD/SSD Support	2 x 2.5" Internal Bays

Onboard Slots	1 x mSATA
Expansion	
PCIe	1 x PCIe*8 FH/HL (Optional)
mini-PCIe	N/A
Miscellaneous	
Watchdog	Yes
Internal RTC with Li Battery	Yes
TPM	Yes (Optional)
Cooling	
Processor	Passive CPU Heatsink
System	4 x Individual Hot-swappable Cooling Fans w/ Smart Fan
Environmental Parameters	
Temperature	0~40°C Operating -20~70°C Non-Operating
Humidity (RH)	5~90% Operating 5~95% Non-Operating
System Dimensions	
(WxDxH)	438mm x 650mm x 44mm
Weight	11kg
Package Dimensions	
(WxDxH)	841mm x 588mm x 215mm
Weight	17kg
Power	
Type / Watts	650W 1+1 Redundant PSUs
Input	AC 100V~240V @47~63Hz
Certification	
Approvals and Compliance	RoHS, CE/FCC Class A, UL


Product I/O View

Images are for reference only. See ordering information for SKU details.

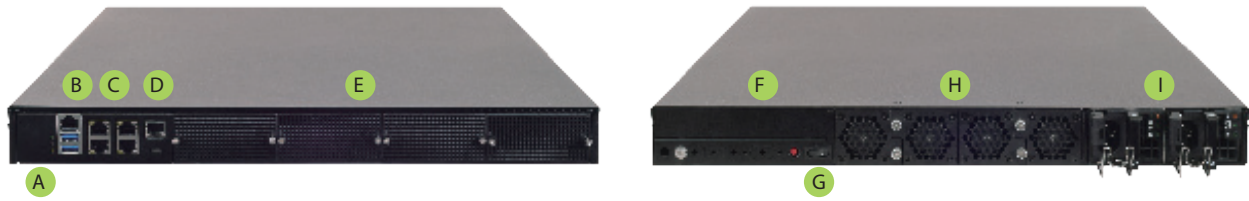

- A System LED
- B 2x USB3.0 & IO Interface
- C 4x GbE RJ45 or 4x SFP+
- D IPMI & Mini-USB Console
- E NIC Module Slots
- F PCIe Slot (Optional)
- G Power Switch
- H Swappable Fans
- I 650W 1+1 Redundant PSUs

Dimensions (WxDxH): 438 x 650 x 44 mm

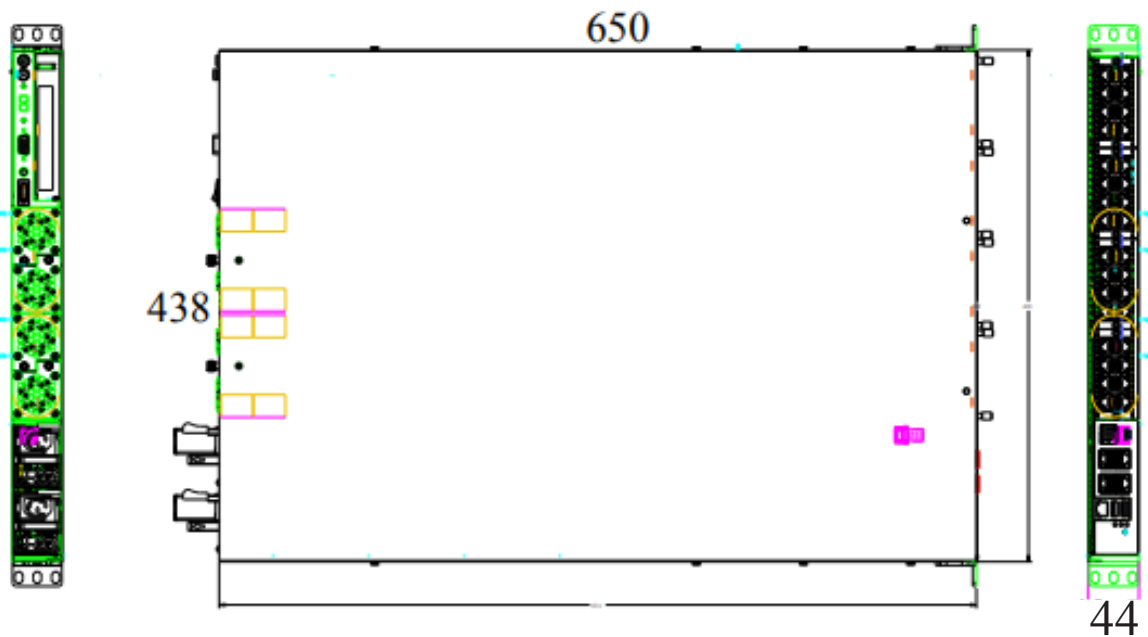

Ordering Information

NCA-5520A Intel® C626 w/ BMC + 4x 10G SFP+ MGMT

NCA-5520B Intel® C621 + 4x GbE RJ45 MGMT

V1-2023.07.11

Lanner

© Lanner Electronics Inc. All rights reserved.
All product specifications are subject to change without notice.
contact@lannerinc.com | www.lannerinc.com

NCA-5520

**EQUIPMENT
FOR SALE**

LANNER NCA-4020 & NCA-5520

Lanner



NCA 4020

1U 19" Rackmount Network Appliance with Intel Xeon® D-2100 Multi-core Processor (Codenamed Skylake-DE)

BRAND NEW



NCA 5520

1U 19" Rackmount Network Appliance Built with 2nd Gen Intel® Xeon® Scalable Family Processors (Codenamed Cascade Lake SP)

**Contact Today
For Current Inventory**

Visit [TELECOMCAULIFFE.com](https://www.telecomcauliffe.com)

✓ REDUCING LEADTIMES

✓ COST SAVINGS

✓ LIFETIME WARRANTY

✓ SUSTAINABLE SOLUTIONS

PICS | **TELECOMCAULIFFE**
A PICS TELECOM TEAM

BILL MCAULIFFE

Director of Sales – National Accounts

TEAMMCAULIFFE@PICSTELECOM.COM | 585.746.6383 | [TELECOMCAULIFFE.COM](https://www.telecomcauliffe.com)

* This document contains confidential and proprietary information that is the property of PICS Telecom International, which is provided for the sole purpose of permitting the recipient to respond to this Equipment Sale Flyer. No part of this document is to be used without written permission by PICS Telecom. All trademarks, trade names, photos, or logos mentioned or used are the property of their respective owners and are intended solely for identification purposes.