

cnWave™ 60 GHz V5000

Distribution Node

QUICK LOOK:


- Supports 57 to 66 GHz
- Dual-sector with 280° coverage
- Up to 7.2 Gbps (1.8 Gbps DL and 1.8 Gbps UL per sector). Channel bonding typically doubles capacity
- TDMA/TDD channel access and Network Synchronization
- 802.11ay technology with Terragraph certification



Designed for high-speed and high-density deployments

Cambium Networks' cnWave 60 GHz solution provides easy, fast and cost-effective wireless gigabit connectivity for edge access and/or high-capacity backhaul for edge access solutions at a significantly lower TCO than fiber infrastructure. Service providers and enterprises now have access to gigabit for business and residential connectivity, backhaul for Wi-Fi access or LTE/5G small cell. Certified for Facebook Terragraph, cnWave solutions are highly efficient at handling high-density deployments in cities and suburban areas.

V5000 is featured with two sectors covering up to 280° with beamforming. A single V5000 can connect up to four other distribution nodes or up to 30 client nodes. V5000 can be used for PTP and PMP configurations.



Cloud and on-premises management

cnWave 60 GHz operates with Cambium Networks' cnMaestro management system. cnMaestro™ is a cloud-based or on-premises software platform for secure, end-to-end network control. cnMaestro wireless network manager simplifies device management by offering full network visibility and zero-touch provisioning. View and perform a full suite of wireless network management functions in real time. Optimize system availability, maximize throughput and meet emerging needs of business and residential customers.

cnWave™ 60 GHz V5000 Distribution Node

Client Node Model				
	V1000	V2000	V3000 44.5 dBi	V3000 40.5 dBi
Maximum Throughput in DL or UL	1 Gbps	1.8 Gbps	1.8 Gbps 2.7 Gbps with CB2	1.8 Gbps 2.7 Gbps with CB2
Maximum EIRP	38 dBm	49 dBm	60.5 dBm	54.5 dBm

Specifications

Spectrum

Frequency Range 57 to 66 GHz in a single SKU

Channel Width 2.16 GHz, 4.32 GHz*

Carrier Bonding* Up to 2 adjacent channels

Mode of Operation PMP or PTP

Interface

Channel Access TDMA/TDD

Ethernet Interface 1 x 100/1000/10G BaseT with PoE In,
1 x 100/1000 BaseT with 802.3at PoE Out,
1 x SFP+ 1G and 10G

Networking

Protocols Supported IPv4, IPv6, Layer2 Bridge, Layer3 IPv6 Routing, Open/R Distributed Networking

Network Management cnMaestro, HTTP, HTTPS, SNMP v2c & v3

MTU 1,900 bytes

VLAN 802.1ad (QinQ), 802.1Q with 802.1p priority

Security

Encryption 128-bit AES

Firmware Security Signed Firmware Images

* Available in future release

Performance

Modulation & Coding Schemes MCS-0 (BPSK) to MCS-12 (16-QAM)

Latency < 1 ms

Maximum EIRP 38 dBm

Antenna

Gain 22.5 dBi

Type Integrated

Beamforming Scan Range +/- 140° azimuth, +/- 20° elevation

Beam Width 12°

Powering

Type Passive PoE (42-57 V)

Power Consumption 65 W with AUX PoE Out in use,
35 W without AUX PoE Out in use

Physical

Environmental IP66/67

Temperature -40°C to 60°C (-40°F to 140°F)


Mean Time Between Failure > 40 years

Weight < 4 kg (8.8 lbs)

Dimensions 280 mm x 186 mm x 103 mm
H x W x D (11.0 in x 7.32 in x 4.06 in)

Wind Survival 200 km/h (124 mi/h)

cnWave™ 60 GHz V5000 Distribution Node

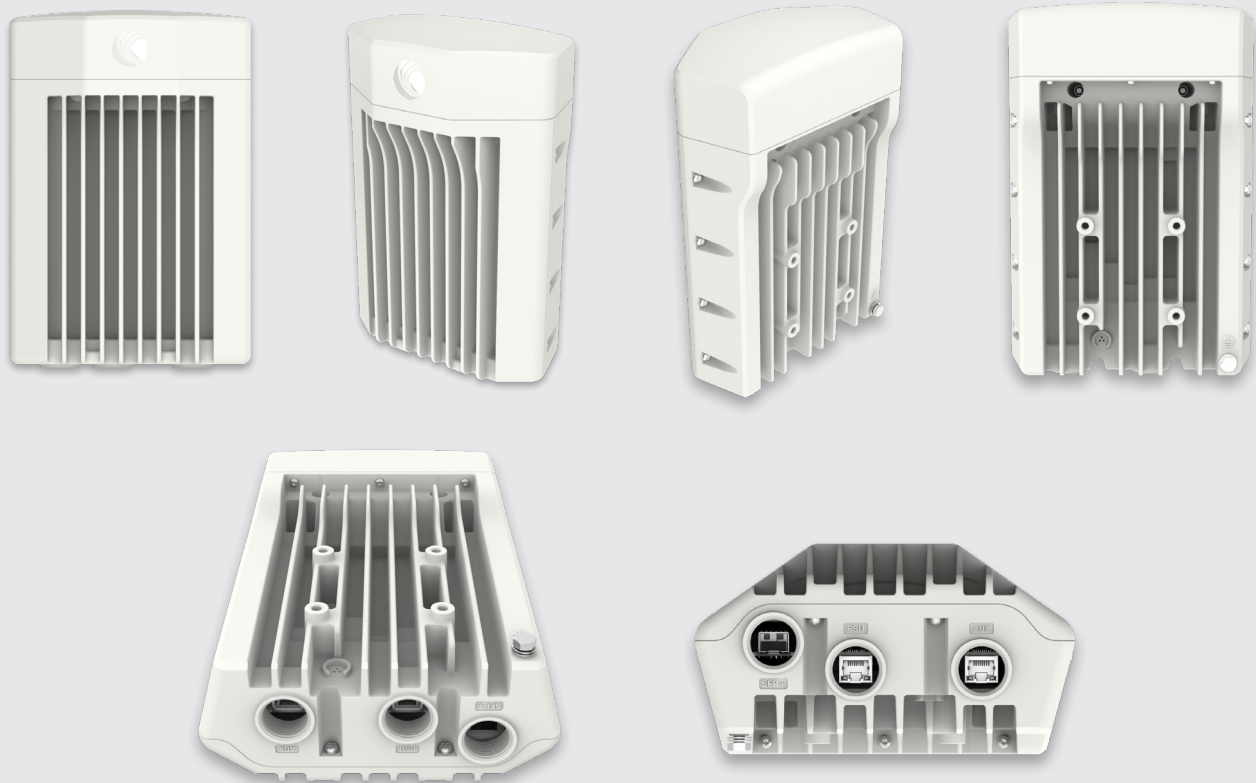

Ordering Information

C600500A004B cnWave 60 GHz V5000 Distribution Node

C600500A005B cnWave 60 GHz V5000 Distribution Node - Israel Only

C000000L136A Universal Wall Mount Bracket

C000000L137A Universal Pole Mount Bracket for 1 inch to 3 inch diameter poles

NOTE: Power Supply Unit must be ordered separately.

About Cambium Networks

Cambium Networks enables service providers, enterprises, industrial organizations, and governments to deliver exceptional digital experiences, and device connectivity, with compelling economics. Our ONE Network platform simplifies management of Cambium Networks' wired and wireless broadband and network edge technologies. Our customers can focus more resources on managing their business rather than the network. We deliver connectivity that just works.

cambiumnetworks.com

06222023

**EQUIPMENT
FOR SALE**

CAMBIUM NETWORKS 60GHZ cnWAVE

V1000 | V3000 | V5000



BRAND NEW

**Large Quantities
Available!**

**Contact Today
For Current Inventory**

Visit TELECOMCAULIFFE.com



Part #
C600500C001A



Part #
**C600500C024A
C600500D003A**



Part #
C600500A004A

✓ **REDUCING LEADTIMES** ✓ **COST SAVINGS** ✓ **LIFETIME WARRANTY** ✓ **SUSTAINABLE SOLUTIONS**



BILL MCAULIFFE
Director of Sales – National Accounts

TEAMMCAULIFFE@PICSTELECOM.COM | 585.746.6383 | **TELECOMCAULIFFE.COM**

* This document contains confidential and proprietary information that is the property of PICS Telecom International, which is provided for the sole purpose of permitting the recipient to respond to this Equipment Sale flyer. No part of this document is to be used without written permission by PICS Telecom. All trademarks, trade names, photos, or logos mentioned or used are the property of their respective owners and are intended solely for identification purposes.